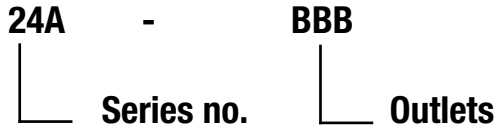


SERIES 24 AWWA C503, WET BARREL

HYDRANT

American AVK Wet Barrel Hydrant Class Code/ Ref. # / Breakdown



I - Ductile Iron
S - Stainless Steel

**PHH - 1 Pumper,
 2 Hose Outlets**
**PHN - 1 Pumper,
 1 Hose Outlet**
**PPH - 2 Pumps,
 1 Hose Outlet**

Series 24 AWWA C503 Availability Listing




Material	PHN 1 Pumper – 1 Hose Outlet	PHH 1 Pumper – 2 Hose Outlets	PPH 2 Pumps – 1 Hose Outlet
24I – Ductile Iron – 250/350 PSI*	X	X	X
24S – Stainless Steel – 200 PSI	X	X	X

* - As of June, 2020, all ductile iron wet barrel hydrants have been changed to the threaded high pressure configuration.

AWWA C503 WET BARREL HYDRANT ACRONYMS :

AWWA - American Water Works Association
DI - Ductile Iron
EPDM - Ethylene Propylene Diene Monomer
FL - Flange
FM - Factory Mutual

PE - Polyethylene
PUR - Polyurethane
SS - Stainless Steel
THD - Threaded
UL - Underwriters Laboratories

Type	AVK Ref. #	Size	Weight		Price US \$	
			kg	lb		
Series 24S/PHN (244X) Wet barrel hydrant Stainless Steel To AWWA C503 UL Listed FM Approved 1 Hose Nozzle 1 Pumper Nozzle 200 PSI		24S/PHN	1 x 2.5" and 1 x 4"	46	101	6,597
		24S/PHN	1 x 2.5" and 1 x 4.5"	46	101	6,597
Series 24S/PHH (245X) Wet barrel hydrant Stainless Steel To AWWA C503 UL Listed FM Approved 2 Hose Nozzles 1 Pumper Nozzle 200 PSI		24S/PHH	2 x 2.5" and 1 x 4"	57	126	8,991
		24S/PHH	2 x 2.5" and 1 x 4.5"	57	126	8,991
Series 24S/PPH (243X) Wet barrel hydrant Stainless Steel To AWWA C503 UL Listed 1 Hose Nozzle 2 Pumper Nozzle 200 PSI		24S/PPH	1 x 2.5" and 2 x 4"	46	101	9,491
		24S/PPH	1 x 2.5" and 2 x 4.5"	46	101	9,491