

**AVK CONCENTRIC BUTTERFLY VALVE, ROTORK ACTUATION, 816/BFV/ROT/GB
 WITH VULCANIZED LINER, CLASS 150B&250B - ABOVE GROUND WAF**
 Wafer Ends - Valve Sizes 3" - 20"

Use:
 For water to maximum 160°F.

Tests:
 Hydraulic tests to AWWA C504:

	150B	250B
Shell Test:	300 PSI	500 PSI
Seat Test:	150 PSI	250 PSI


Approvals:
 Certified to: ANSI/NSF 61, ANSI/NSF 372



Standard Materials:

Body	Ductile iron ASTM A536 with vulcanized EPDM liner
Coating	Two Component, High Solids Epoxy
Stems	Standard: 17-4PH Stainless steel ASTM A564
Bushings	Copper alloy ASTM B505
Disc (*)	Ductile iron ASTM A536 with Ni-Cu seat
Mounting hardware, Set Screw	Stainless steel
O-rings	ASTM D2000 Buna "N" nitrile rubber

(*) 3"-4" disc material is CF8M 316 stainless steel

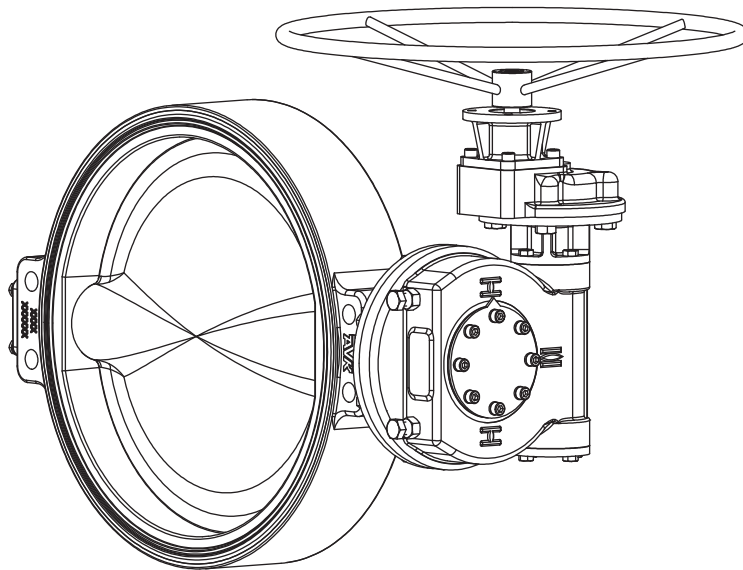


AVK CONCENTRIC BUTTERFLY VALVE, ROTORK ACTUATION, 816/BFV/ROT/GB WITH VULCANIZED LINER, CLASS 150B&250B - ABOVE GROUND WAF

Wafer Ends - Valve Sizes 3" - 20"

Component List:

801. Body	811. Gearbox	818. Stem Plate	825. End Plate
804. Upper Shaft O-ring	812. Hand Wheel	819. O-ring Retainer	826. End Plate Washers
805. Drive Shaft	814. Gearbox Bolt	820. Stem-Disc Screws	827. End Plate Bolts
806. Stub Shaft	815. Gearbox Washer	821. Axial Bearing	828. Stem Plug O-ring
807. Disc	816. Hand Wheel Set Screw*	822. Bearing Adjustment Screws*	829. Stem Plug
810. Gearbox Key*	817. Stem Plate Retaining Screws	824. End Plate O-ring	

* Not shown

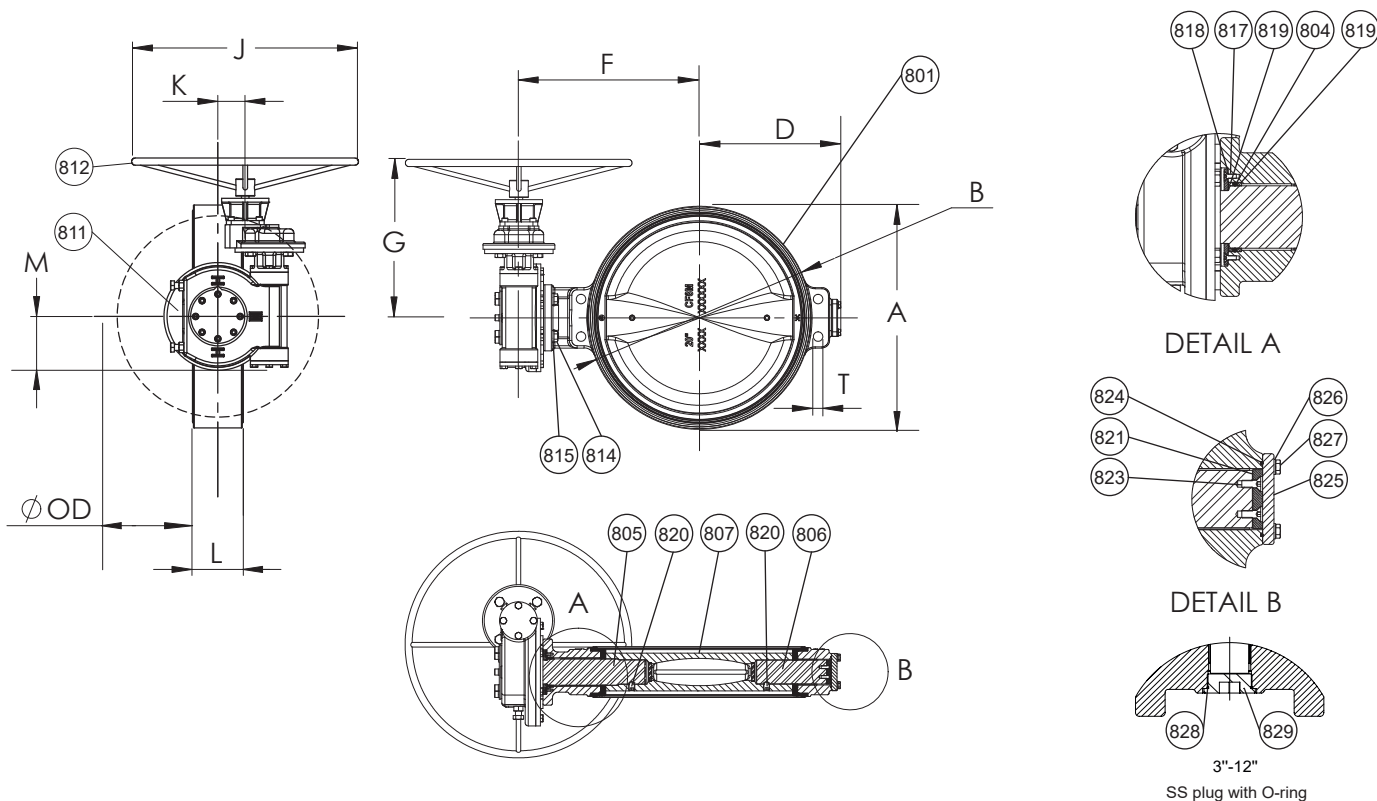

Ref No.	Size	A	B	D	F	G	J	K	L	M	T	ØOD	TURNS		WT. LBS.
													150/250	SHPG. TO OPEN	
816-080-WAF-RGB	3"	5.31"	2.20"	3.75"	6.86"	7.91"	7.87"	2.80"	2.12"	6.73"	NA	0.47"	9/9	32	
816-100-WAF-RGB	4"	6.42"	3.29"	4.50"	7.38"	7.91"	7.87"	2.80"	2.37"	6.73"	NA	0.84"	9/9	38	
816-150-WAF-RGB	6"	8.27"	5.30"	5.50"	8.66"	7.91"	7.87"	2.80"	2.93"	6.73"	0.88"	1.56"	9/9	49	
816-200-WAF-RGB	8"	10.51"	7.46"	6.75"	9.69"	10.35"	7.87"	3.38"	3.06"	6.73"	0.88"	2.50"	10/10	75	
816-250-WAF-RGB	10"	12.75"	9.51"	8.00"	11.30"	10.35"	11.81"	3.38"	3.24"	6.73"	1.00"	3.40"	10/10	101	
816-300-WAF-RGB	12"	14.76"	11.53"	9.50"	12.29"	10.35"	11.81"	3.38"	3.53"	6.73"	1.00"	4.27"	10/10	114	
816-350-WAF-RGB	14"	17.36"	13.48"	10.70"	14.02"	11.73"	15.75"	3.38"	3.95"	6.73"	1.13"	5.05"	10/10	157	
816-400-WAF-RGB	16"	19.76"	15.46"	12.28"	14.02"	11.73"	15.75"	3.38"	4.29"	6.73"	1"-8UNC-2B	5.88"	10/10	222	
816-450-WAF-RGB	18"	21.85"	17.42"	13.56"	16.94"	11.73"	23.62"	4.11"	4.76"	9.31"	1-1/8"-7UNC-2B	6.65"	10/12	341	
816-500-WAF-RGB	20"	24.13"	19.36"	14.70"	18.98"	16.54"	23.62"	5.35"	5.28"	9.31"	1-1/8"-7UNC-2B	7.39"	12/24	413	

