


AVK SERIES 67 POST / FLUSHING DRY BARREL HYDRANT

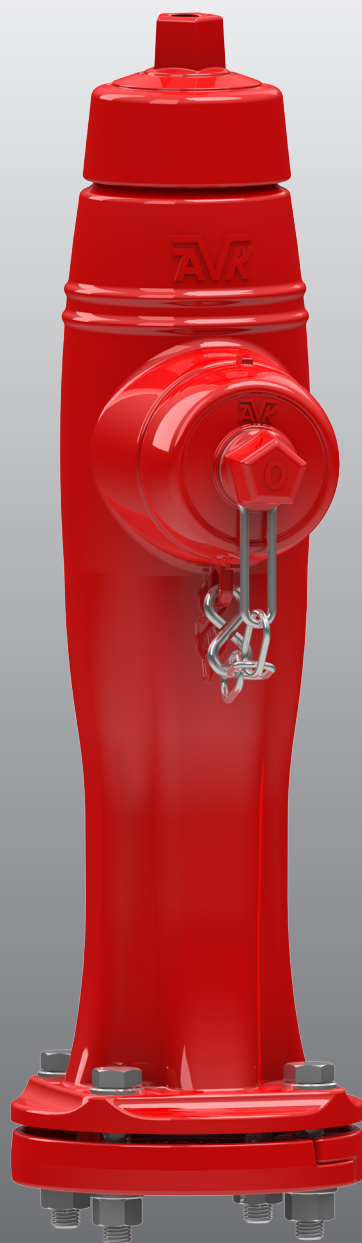

EXPECT SOLUTIONS, NOT JUST
PRODUCTS

Expect... **AVK**

AVK DRY BARREL POST/FLUSHING HYDRANT

The AVK Series 67 Post Hydrant is designed and built to the same strict attention to detail and quality as the full size AVK hydrants.

- Self draining dry barrel hydrant to prevent freezing.
- Available in any depth of bury (6 inch increments).
- 2 1/4" main valve opening.
- Low head loss design.
- Rated to 250 PSI working pressure.
- All internal parts are removable from the top for easy maintenance.
- Can be open left or open right .
- Optional hand wheel available.
- Optional stainless steel lower stem.
- 1 year warranty

Operating nut available in a wide variety of shapes and sizes

Two lower and one upper o-ring.

2.5" NST hose outlet standard; optional threads upon request. Easily replaced in the field.

Breakable traffic flange and stainless steel breakable coupling.

Cast ductile iron barrels: 1/2 ft. through 4 1/2 ft. Can be bolted together for any bury depth.

Bronze drain ring and main valve seat.

EPDM encapsulated ductile iron one piece main valve.

Fusion bonded epoxy coated shoe with foot for easy installation.

Weathershield

Grease filled operating assembly.

Stainless steel upper stem

Ductile iron nozzle section

American AVK Company

2155 Meridian Blvd.
Minden, NV
89423
USA

Tel.: 775-552-1400
Fax.: 775-552-1031
sales@avkus.com
www.americanavk.com

Optional inlets:

- Flanged 2 1/2", 3"
- MJ 2", 3", 4"
- NPT 2", 2 1/2", 3"

S67 POST/FLUSHING_A 10-9-2017
Copyright©AVK Group A/S 2017