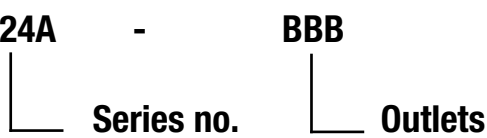


# SERIES 24 AWWA C503, WET BARREL

# HYDRANT

American AVK Wet Barrel Hydrant Class Code/ Ref. # / Breakdown



- I - Ductile Iron

S - Stainless Steel
- PHH - 1 Pumper,  
2 Hose Outlets

PHN - 1 Pumper,  
1 Hose Outlet

PPH -2 Pumpers,  
1 Hose Outlet

Series 24 AWWA C503 Availability Listing			
Material	PHN 1 Pumper – 1 Hose Outlet	PHH 1 Pumper – 2 Hose Outlets	PPH 2 Pumpers – 1 Hose Outlet
24I – Ductile Iron – 250/350 PSI*	X	X	X
24S – Stainless Steel – 200 PSI	X	X	X

\* - As of June, 2020, all ductile iron wet barrel hydrants have been changed to the threaded high pressure configuration.

AWWA C503 WET BARREL HYDRANT ACRONYMS :

- AWWA - American Water Works Association

DI - Ductile Iron

EPDM - Ethylene Propylene Diene Monomer

FL - Flange

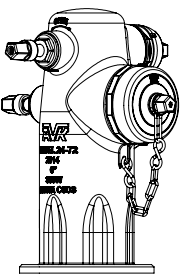
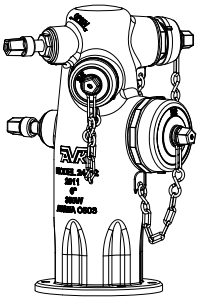
FM - Factory Mutual
- PE - Polyethylene

PUR - Polyurethane

SS - Stainless Steel

THD - Threaded

UL - Undewriters Laboratories

Type	AVK Ref. #	Size	Weight kg	Weight lb	Price US \$
<b>Series 24T/PHN (2472) Wet barrel hydrant Ductile Iron, High Pressure</b>  To AWWA C503 UL Listed FM Approved 1 Hose Nozzle 1 Pumper Nozzle UL/FM - 250 PSI AWWA - 350 PSI					
	Tapped and steel plugged, 2.5" NPT thread in top of nozzle section. Add \$650				
<b>Series 24T/PHH (2492) Wet barrel hydrant Ductile Iron, High Pressure</b>  To AWWA C503 UL Listed FM Approved 2 Hose Nozzles 1 Pumper Nozzle UL/FM - 250 PSI AWWA - 350 PSI					
	6 hole bolting options only				
<b>Series 24T/PPH (2422) Wet barrel hydrant Ductile iron</b>  To AWWA C503 UL Listed 1 Hose Nozzle 2 Pumper Nozzles UL - 250 PSI AWWA - 350 PSI	