

AMERICAN AVK SWING CHECK VALVE, 250 PSI
Tested to AWWA C508 - Resilient Seated with Lever & Weight
Flanged Ends Drilled to ANSI B16.42 Class 150 - Valve Sizes 3" - 12"

41/RW
RSLT/LW

Use:
 For potable water and neutral liquids to maximum 160°F.

Tests:
 Hydraulic test to AWWA C508:
 Shell Test: 500 PSI
 Seat Test: 250 PSI


Optional Extras:
 Resilient seated disc assembly.
 Tapping boss, tapped and plugged.
 Priming Device

Approvals:
 Certified to: ANSI/NSF 61, ANSI/NSF 372



Standard Materials:

Body, Bonnet, Weight, Lever Hinge (10"-12")	Ductile iron, ASTM A536
Coating	Electrostatically applied fusion-bonded epoxy. Meets or exceeds AWWA C550
O-Rings, Bonnet Gasket	NBR
Shaft, (Hinge, 3"- 8") Bonnet Bolts, Washers, Keys	Stainless steel
Bushings	Bronze
Resilient Seated Disc	EPDM rubber with a carbon steel core

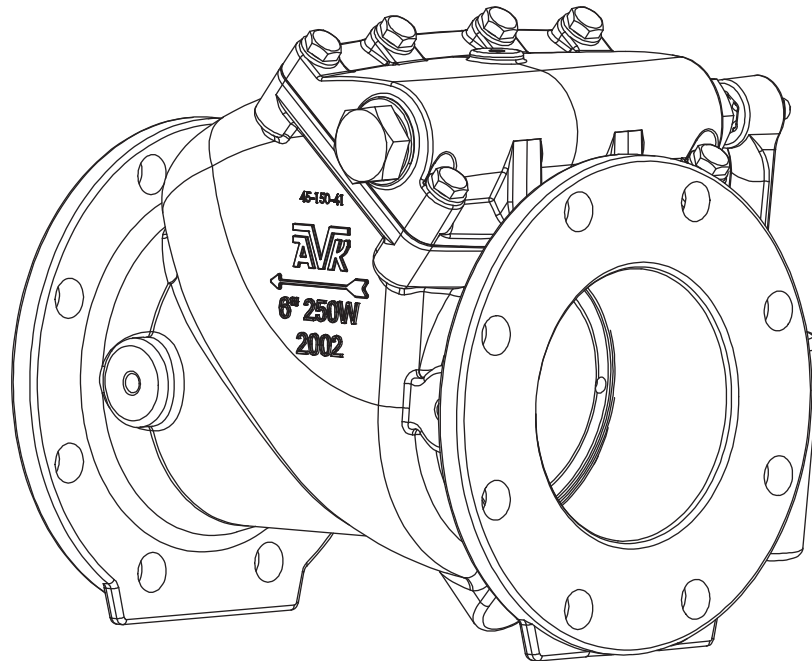

C508 clear waterway design. Laylength to ANSI B16.10



AMERICAN AVK SWING CHECK VALVE, 250 PSI
Tested to AWWA C508 - Resilient Seated with Lever & Weight
Flanged Ends Drilled to ANSI B16.42 Class 150 - Valve Sizes 3" - 12"

41/RW
RSLT/LW


Components

400. Body	406. Bonnet Bolt	412. Bonnet Gasket	418. Inner Bushing O-ring	423. Disc Lock Washer**
401. Disc Nut	407. Bonnet	413. Disc	419. Weight	429. Bonnet O-ring***
402. Disc Washer	408. Shaft	414. Shaft Nut	420. Set Screw	430. Hinge Connector*
403. Disc Bushing	409. Key	415. Shaft Washer	421. Outer Bushing O-ring	431. Retaining Washers*
404. Hinge	410. Lock Washer	416. Lever	422. Closed Bushing	432. Shaft Spacers*
405. Bonnet Washer	411. Hinge Bolt	417. Open Bushing		

* 10" and 12" Valves (not shown)

** As of March 1st, 2008 on 3" through 8" valves, the Disc Lock Washer (423, not shown), and Disc Nut (401), are replaced by a new self locking Disc Nut (401).

*** As of June 1st, 2014, new style bonnets that eliminate the Outer Bushing O-rings (421), and utilize new Inner Bushing O-rings (429) for all size check valves

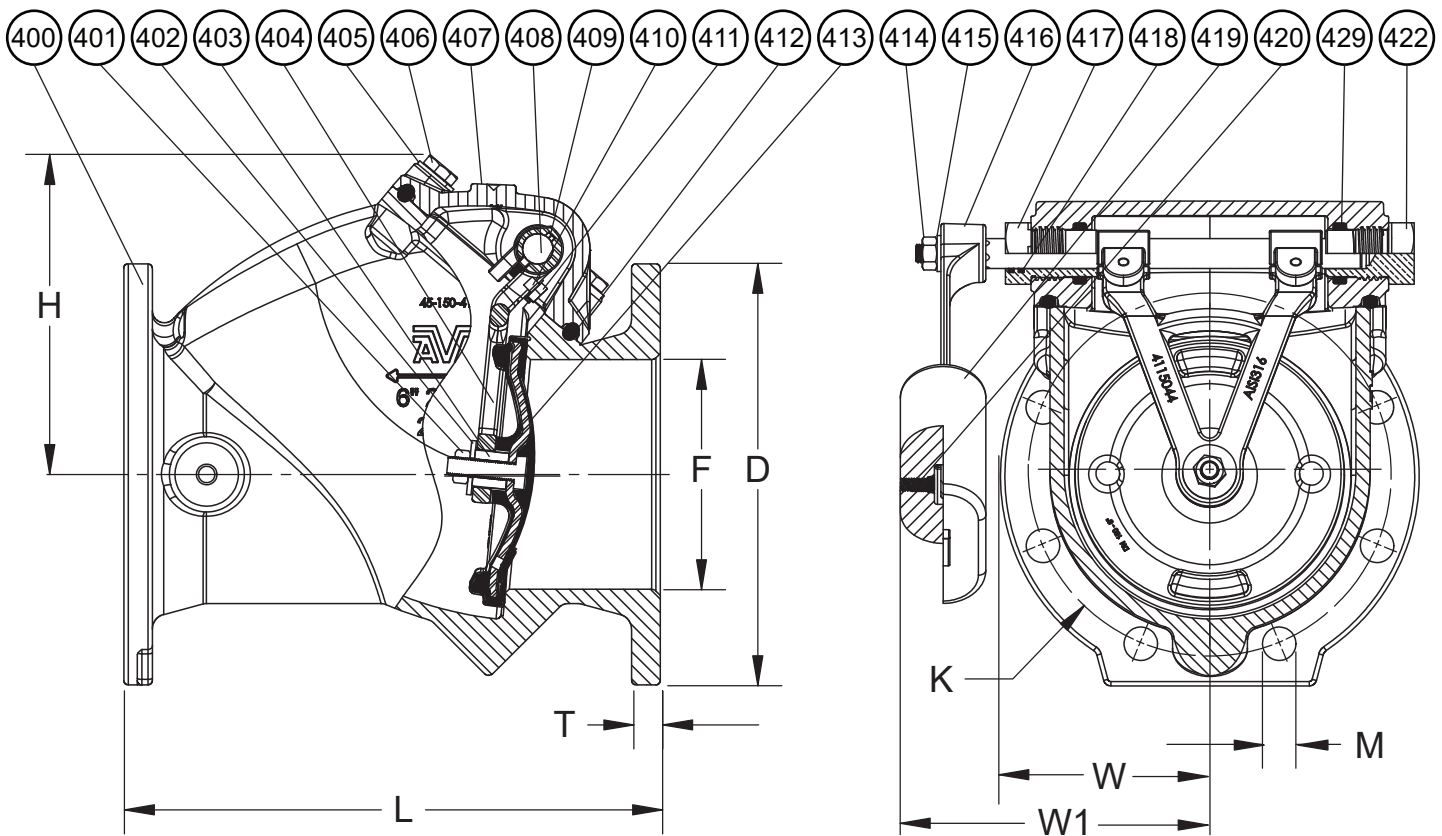

Ref No.	Size	D	F	H	K	L	M	T	W	W1	Flange Holes	Weight (lbs.)
41-080-RW	3"	7.50"	3.00"	5.50"	6.00"	9.50"	0.75"	0.75"	3.76"	5.70"	4	35
41-100-RW	4"	9.00"	4.00"	6.00"	7.50"	11.50"	0.75"	0.75"	4.50"	6.70"	8	51
41-150-RW	6"	11.00"	6.00"	7.75"	9.50"	14.00"	0.88"	0.75"	5.50"	8.07"	8	86
41-200-RW	8"	13.50"	8.00"	9.00"	11.75"	19.50"	0.88"	0.80"	6.75"	9.05"	8	165
41-250-RW	10"	16.00"	10.00"	13.50"	14.25"	24.50"	1.00"	1.20"	8.01"	16.10"	12	450
41-300-RW	12"	19.00"	12.00"	15.37"	17.00"	27.50"	1.00"	1.26"	9.50"	15.94"	12	590

Specify right-hand or left-hand lever & weight mounting when ordering

