

AMERICAN AVK TELESCOPIC INDICATOR POST

To UL 789 - to ULC CEX 1393 - To FM class number 1110
Valve Sizes 2½" - 24"

34/0X
TELESCOPIC INDICATOR POST

Use:

Will fit any gate valve (4" - 24") with a post indicator mounting plate and a 2" square wrench nut

Optional Extras:

Stem Lengths	To various bury depths
Lower barrels	Ductile iron
Handwheel	Replaces Operating Wrench

Approvals:




UL/ULC Listed, 4" - 24"*

FM Approved, 4" - 24"*

*2½"-3" not UL/ULC - FM Approved


Standard Materials:

Wrench Nut Adaptor, Operating Wrench, Post Indicator Bell, Indicator Head, Bonnet	Ductile iron ASTM A536
Handwheel	Grey iron
Bolts, Nuts, Washers,	316 Stainless steel
Set Screw, Tension Pin, Circlip Ring	Stainless steel
Upper, Lower Stem,	Cold drawn steel
Lower Barrel	PVC Pipe
Target, Operating Nut	Bronze
Target Sign	Aluminum (painted)
Window	Polycarbonate

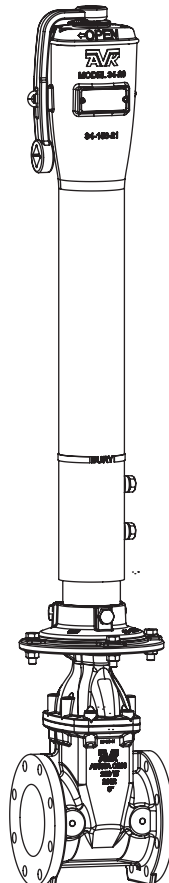

AMERICAN AVK TELESCOPIC INDICATOR POST
To UL 789 - to ULC CEX 1393 - To FM class number 1110
Valve Sizes 2 1/2" - 24"

34/0X
TELESCOPIC INDICATOR POST

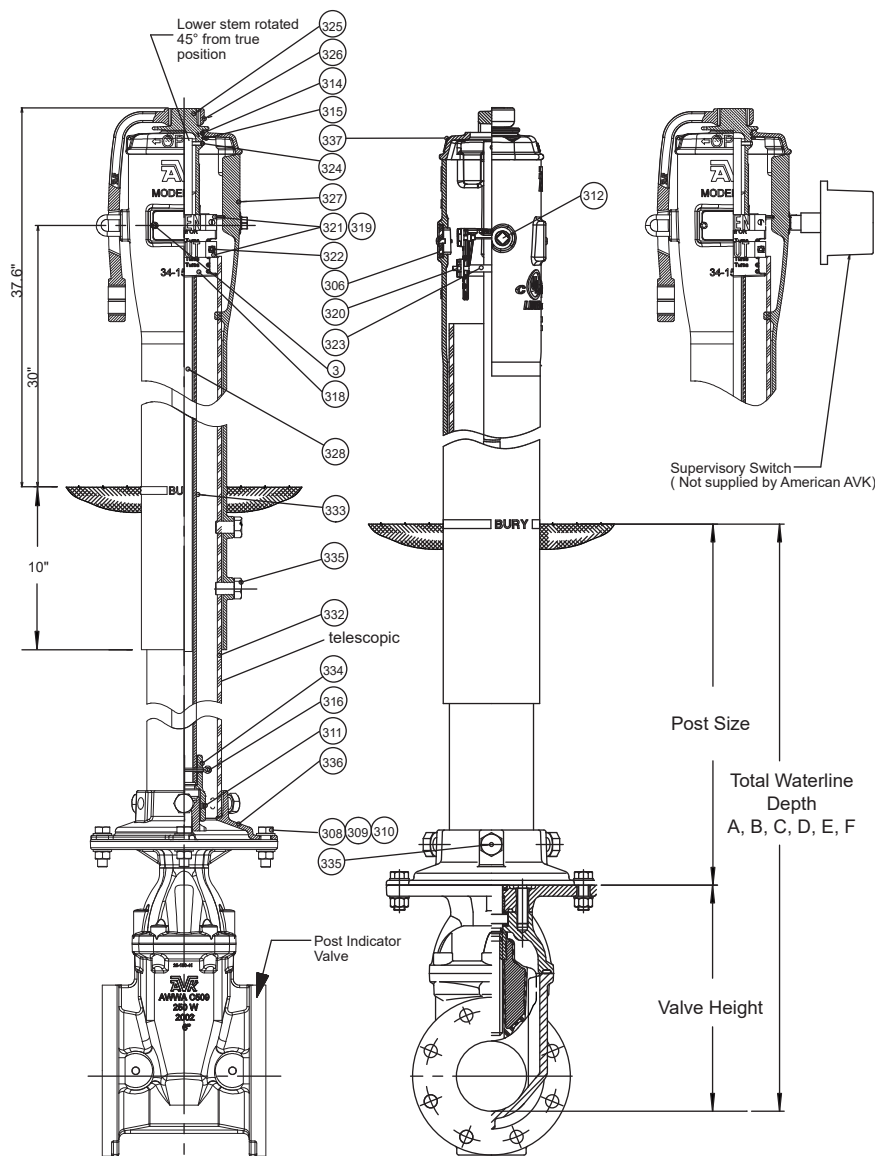

- Component List:
- 216. Bonnet Bolts (Not shown)
 - 3. Window Screw
 - 303. Handwheel - Optional, not shown
 - 306. Window
 - 308. Flange Bolt
 - 309. Flange Bolt Washer
 - 310. Flange Bolt Nut
 - 311. Wrench Nut Adapter Set Screw
 - 312. Pipe Plug
 - 314. Stem Nut O-Ring
 - 315. Stem Nut Snap Ring
 - 316. Cotter Pin
 - 318. Target
 - 319. Shut Plate
 - 320. Plate Nut
 - 321. Open Plate
 - 322. Plate Attachment Screw
 - 323. Target Spacer
 - 324. Upper Stem Attachment Pin (3400)
 - 325. Stem Nut (3400)
 - 326. Operating Wrench
 - 327. Telescopic Post Head/Barrel Sect.
 - 328. Telescopic Post Upper Stem
 - 332. Lower Barrel
 - 333. Lower Stem
 - 334. Wrench Nut Adaptor (3400)
 - 335. Telescopic Post Attachment Bolt
 - 336. Bell Adapter
 - 337. Bonnet

	Post Size without valve	
	min	max
Post A	20	43
Post B	42	65
Post C	64	87
Post D	86	109
Post E	104	127
Post F	126	149

Total Water Line Depth - To Bottom of Pipe												
Valve Size	Post A (00)		Post B (01)		Post C (02)		Post D (04)		Post E (06)		Post F (07)	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
2.5"*	31	54	53	76	75	98	97	120	115	138	137	160
3"	31	54	53	76	75	98	97	120	115	138	137	160
4"	33	56	55	78	77	100	99	122	117	140	139	162
6"	38	61	60	83	82	105	104	127	122	145	144	167
8"	43	66	65	88	87	110	109	132	127	150	149	172
10"	47	70	69	92	91	114	113	136	131	154	153	176
12"	51	74	73	96	95	118	117	140	135	158	157	180
14"	59	82	81	104	103	126	125	148	143	166	165	188
16"	62	85	84	107	106	129	128	151	146	169	168	191
18"	70	93	92	115	114	137	136	159	154	177	176	199
20"	70	93	92	115	114	137	136	159	154	177	176	199
24"	80	103	102	125	124	147	146	169	164	187	186	209

*2 1/2"-3" not UL/ULC - FM Approved

