

AMERICAN AVK HIGH PRESSURE, 250 PSI, NOSTALGIC, DRY BARREL HYDRANT 5.25" MAIN VALVE

27N/PHH
NOSTALGIC

Meets or exceeds AWWA C502 (latest) - Working Pressure - 250 PSI

Inlet Bases: Flanged in accordance with ANSI B16.1 Class 125,

Mechanical and Push-On Joint in accordance with ANSI/AWWA C111/A21.11

Use:

For water and neutral liquids to maximum 160°F.

Tests:

Hydraulic test to AWWA C502:

Seat Test: 500 PSI

Approvals:

UL/ULC Listed,
FM Approved

Certified to:

NSF/ANSI 61

NSF/ANSI 372



Certified to
NSF/ANSI 61

Certified to
NSF/ANSI 372

Components:

Nozzle Section, Bonnet, Barrels, Standpipe Flanges,
Breakable Flange, Main Valve Flange, Base,

Caps, Weathershield

Nozzles, Valve Seat Ring, Drain Ring
Operating Nut, Thrust Nut

Brass Fittings, Brass Plugs

Main Valve

Stem Rod Couplings, Lock Rings, Nozzle Retaining
Screw, Lock Plate, Lock Plate Screw, Stop Pins,
Coupler Pins, Main Valve Retaining Pin, Spring Pins,

Coating

Stop Nut, Chain Set, Hardware

Barrel Gasket, Cap Gasket, O-rings

Lubrication Hole Seal

Anti-Friction Washer

Base Elbow / Inlet Configuration

☐ 6" MJ

☐ 4" MJ

☐ 8" MJ*

*Not FM Approved

Standard:

Ductile Iron ASTM A536

Cast Iron ASTM A126 Class "B"

Bronze

Brass

Ductile iron core, fully encapsulated with EPDM rubber.

Stainless Steel

Above ground-Fusion bonded epoxy inside and out. Below
ground - Bitumen/Fusion bonded epoxy. Epoxy meets or
exceeds AWWA C550 (latest)

Zinc Plated Steel

NBR - (Barrel Gasket with 304 stainless insert)

Oil Resistant Rubber

Polyamide

☐ 6" Flanged

☐ 4" Flanged

☐ Straight Flanged 6"

☐ 6" Push-on

☐ 4" PE*

☐ 6" PE*

☐ HYMAX®*

Optional Materials:

Hardware

Upper Stem Rod

Lower Stem Rod

Opening Direction

☐ Zinc Plated

☐ 304 Stainless

☐ 304 Stainless

☐ Open Left


☐ 304 Stainless

☐ Epoxy Coated Steel

☐ Epoxy Coated Steel

☐ Open Right

☐ 316 Stainless



Series 27N/PHH
1 Pumper, 2 Hose Outlet

AMERICAN AVK HIGH PRESSURE, 250 PSI, NOSTALGIC, DRY BARREL HYDRANT

5.25" MAIN VALVE

**27N/PHH
NOSTALGIC**


Meets or exceeds AWWA C502 (latest) - Working Pressure - 250 PSI

Inlet Bases: Flanged in accordance with ANSI B16.1 Class 125,

Mechanical and Push-On Joint in accordance with ANSI/AWWA C111/A21.11

Component List:

- | | | | |
|----------------------------|--------------------------------------|----------------------------------|----------------------------------|
| 1. Weathershield Bolt | 16. Upper Stem Rod | 31. Nozzle Section Washer | 54. Drain Ring -Detail B |
| 2. Weathershield | 17. Barrel Gasket | 32. Lock Ring | 55. Brass Plug -Not shown |
| 3. Lock Plate Screw | 18. Bonnet Nut | 33. Breakable Flange | 56. Brass Fitting -Not shown |
| 4. Lock Plate | 19. Hose Nozzle Cap -Detail A | 34. Nozzle Section Nut | 60. Main Valve Retaining Pin |
| 5. Inner Thrust Nut O-ring | 20. Hose Nozzle -Detail A | 36. Coupler Pin | -Detail B |
| 6. Thrust Nut | 21. Hose Nozzle Cap Gasket -Detail A | 37. Breakable Stem Rod | 61. Main Valve Disc -Detail B |
| 7. Outer Thrust Nut O-ring | 22. Hose Nozzle O-ring - Detail A | Coupling | 67. Base |
| 8. Anti-Friction Washer | 23. Nozzle Retaining Screw | 38. Spring Pin | 69. Thrust Bearings |
| 9. Lubrication Hole Seal | 24. Chain Set -Detail A | 41. Lower Stem Rod | 75. Zerk Fitting |
| 10. Operating Nut | 25. Pumper Nozzle O-ring | 46. Standpipe Flange -Detail B | 506. Hydrant Base Bolt -Detail B |
| 11. Stop Nut | 26. Pumper Nozzle | 49. Lower Barrel | |
| 12. Bonnet Bolt | 27. Pumper Nozzle Gasket | 50. Lower Barrel O-ring Detail B | |
| 13. Bonnet Washer | 28. Pumper Nozzle Cap | 51. Valve Seat Ring -Detail B | |
| 14. Bonnet | 29. Nozzle Section | 53. Valve Seat O-ring -Detail B | |
| 15. Stem Seal O-rings | 30. Nozzle Section Bolt | | |

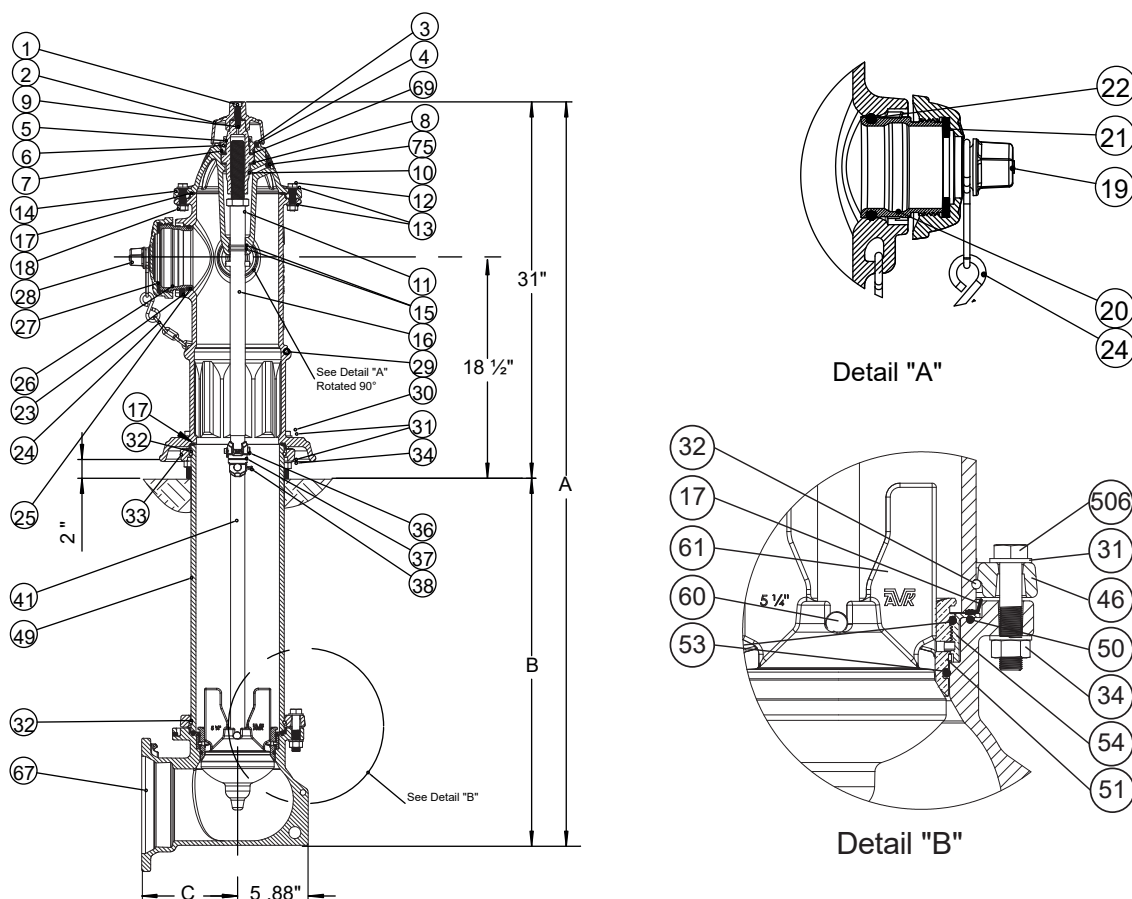

Ref No.	Base Sizes	Outlets	A	B*	C Flanged	C MJ	C Push-on	C PE	C HYMAX GRIP®
27N-PHH-4	- 4"	2x2½", 1x4"/4½"	49" - 247"	18" - 216"	8.00"	8.00"	N/A	23.70"	N/A
27N-PHH-6	- 6"	2x2½", 1x4"/4½"	49" - 247"	18" - 216"	8.00"	8.00"	9.00"	22.80"	11.60"
27N-PHH-8	- 8"	2x2½", 1x4"/4½"	49" - 247"	18" - 216"	N/A	9.38"	N/A	N/A	N/A

* Buries greater than 216" available upon request.

